



pa η da 3.0 Mini 2

455W

MAXIMUM MODULE EFFICIENCY

22.8%

POSITIVE POWER TOLERANCE

0~+5_w



N-type TOPCon Bifacial Module

**IMPROVED POWER
NEVER SETTLE FOR LESS**



Backside Yield



Wide Applications



Superior Yield



Outstanding Bifaciality



Excellent Durability



Yingli Solar Website



QUALIFICATIONS & CERTIFICATES

IEC 61215, IEC 61730, CE

ISO 9001: Quality management systems


ISO 14001: Environmental management systems

IEC 62941: Quality system for PV module manufacturing

ISO 45001: Occupational health and safety management systems



Munich RE

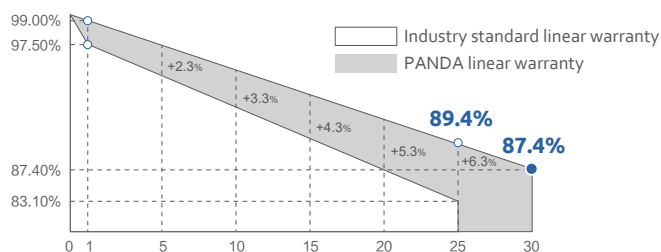

1.00% the 1st year power degradation
0.40% annual power degradation



Densys pv5

| We deliver. You install. The sun does all the rest. |

Data sheet provided for you @ www.densys-pv5.de

